
TDS Portable Drum Scale

TDS

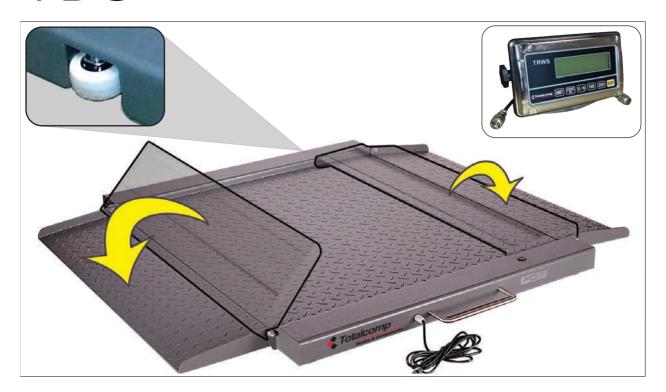


TDS Portable Drum Scale

- Lifting handle and built in wheels for easy moving.
- Platform uses standard (4) 3 mv/v, 350 ohm load cells and stainless steel signal trim summing junction box.
- Live rail makes the weighing surface even larger than 36"

- TRWS Indicator with quick disconnect, battery and AC power adapter
- Backlit LCD display with 22mm digits
- RS-232 can connect to a mini printer, label printer or computer



SPECIFICATIONS TDS Portable Drum Scale

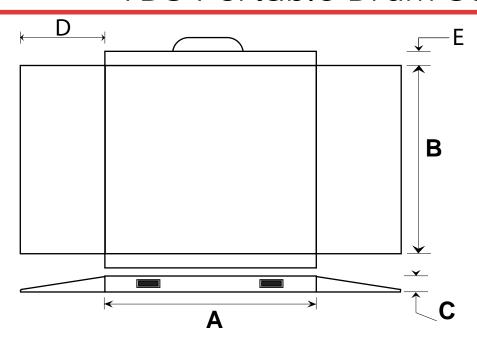

TDS platform is made out of industrial weight heavy duty 1/4" checkered thread steel plate baked powder painted. Two built in folding ramps are low enough to get the hand truck on with ease. Lifting handle and built in wheels for easy moving. Platform uses standard (4) 3 mv/v, 350 ohm load cells and stainless steel signal trim summing junction box. For easy leveling, top bubble level is included. Live rail makes the weighing surface even larger than 36". Adjustable height from 2" to 4.5"

The Totalcomp TRWS Stainless Steel, digital Indicator is compact and easy to setup. TRWS is capable of powering up to 4-350 load cells, this simple device can handle multitude of functions. Applications for Check Weighing, Accumulation, Over/Under and Animal Weighing. A full RS-232 port can transmit data on demand or continuously to match the input requirements of a wide variety of peripheral devices including miniprinters, label printers and computers. Size: 4.63"H x 7.75"W x 3.25"D. Weight: 7 lb. NTEP 13-091 III 6,000 div. AC adapter (110-240V / 9V 800mA) and Ni-MH batteries (1.2V/1200mAhx6) included.

Model	Capacity	Weight	Cell(s)	Size				
				Α	В	С	D	E
TDS-1K	1,000 x 0.5 lb	150 lb	500 lb	36"	36"	2"- 4.5"	10″	4"
TDS-2.5K	2,500 x 1 lb	150 lb	1,000 lb	36"	36"	2"- 4.5"	10″	4"
TDS-5K	5,000 x 1 lb	158 lb	2,500 lb	36"	36"	2"- 4.5"	10"	4"

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



99 Reagent Lane Fair Lawn, NJ 07410 Fax (201) 797-2287 Toll Free Fax (888) 797-2288 Phone (201) 797-2718 Toll Free Phone (800) 631-0347 Email sales@totalcomp.com Website www.totalcomp.com