
**TBL** 

# **Bench Scale**



# Heavy duty TBL Bench/Floor Scale designed for a variety of weighing applications

- ✓ Stainless Steel Construction
- ✓ RS232, Serial Port
- ✓ TLI full Stainless Steel indicator
  ✓ Overload protection for both
- ✓ Adjustable rubber feet
- ✓ Bubble level ,23" column
  - Overload protection for both static and dynamic overloads

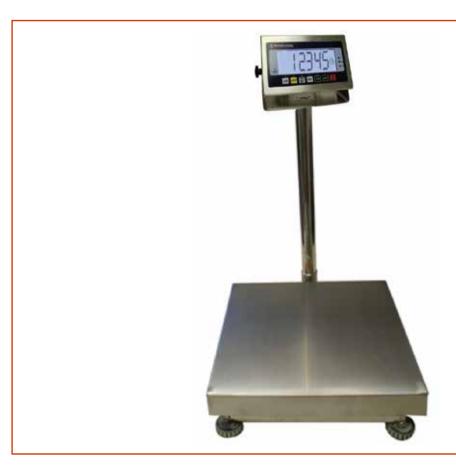

## **Specifications**

## TBL Bench/Floor Scale

TBL Bench/Floor Scale - Totalcomp TBL bench scale comes with an all Stainless Steel heavy platform that includes Stainless Steel load cell at no additional cost and rubber adjustable feet anbbubble level. Integral overload protection is provided for both static and dynamic overloads. Equipped with our TLI full Stainless Steel indicator, 6 digit 2" LCD back-lit display. Battery and AC adapter included. Indicator is mounted on a 23" column. Weighing units: lbs, kg, g, lb:oz. Functions include: Over/Under (lights and buzzer), Animal Weighing, Piece Counting (lb"oz Piece Counting is not legal for trade).

Part Number	Description	Weight
12" x 12" Platform x 4.25" High		
TBL-1212-15-SS	15 X 0.002 lb	42.00
TBL-1212-30-SS	30 x 0.005 lb	42.00
TBL-1212-50-SS	50 x 0.01 lb	42.00
TBL-1212-100-SS	100 x 0.02 lb	42.00
TBL-1212-200-SS	200 x 0.05 lb	42.00
12" x 14" Platform x 4.25" High		
TBL-1214-15-SS*	15 x 0.002 lb	44.00
TBL-1214-30-SS	30 x 0.005 lb	44.00
TBL-1214-50-SS	50 x 0.01 lb	44.00
TBL-1214-100-SS	1 00 x 0.02 lb	44.00
TBL-1214-200-SS	200 x 0.05 lb	44.00
16" x 16" Platform x 4.25" High		
TBL-1616-15-SS*	15 x 0.002 lb	46.00
TBL-1616-30-SS	30 x 0.002 lb	46.00
TBL-1616-50-SS	50 x 0.01 lb	46.00
TBL-1616-100-SS	1 00 x 0.02 lb	46.00
TBL-1616-200-SS	200 x 0.05 lb	46.00
24" x 24" Platform x 4.25" High		
TBL-2424-100-SS	100 x 0.02 lb	101.00
TBL-2424-250-SS	250 x 0.05 lb	101.00
TBL-2424-500-SS	500 x 0.1 lb	101.00
TBL-2424-1000-SS	1,000 x 0.2 lb	101.00
156 2424 1000 00	1,000 X 0.2 ID	101.00

### \* NON-NTEP

#### TOTALCOMP LIMITED WARRANTY

**Totalcomp** warrants this product to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair in at our expense. For warranty service, please obtine a return autorization number from us and return the item, shipping prepaid, with a writen description of the problem. We will rspond promptly with the results of our evaluation.



99 Reagent Lane
Fair Lawn, NJ 07410
Fax (201) 797-2287
Toll Free Fax (888) 797 2288
Phone (201) 797-2718
Toll Free Phone (800) 631-0347
Email sales@totalcomp.com
Website www.totalcomp.com