

## 200 PANEL MOUNT INDIGATOR



## **Integrates Seamlessly Into System Applications**

- Simple 2 Screw Side Slide Mounting Assembly
- Pluggable / Screw-terminal Block for Easy Connectivity
- 3/16 DIN Aluminum Panel Mount Enclosure
- Two Serial Ports
- External Inputs
- Supports 8 350 Ohm Load Cells
- Analog Output Option

## **200 PANEL MOUNT**



ardinal's Model 200 Panel Mount Digital Weight Indicator takes up little space, but provides exceptional functionality. Engineered to adapt easily to your system design, the versatile 200 features input control lines for remote activation of zero, acquire tare, gross and print functions; seven weight units; pushbutton tare; gross, tare, net conversion, and more.

The 200 has a tough sealed membrane keypad for years of dependable use and selectable key lock to help reduce keystroke errors. Cardinal also includes two serial ports for connectivity to a remote display, printer or PC, and these peripheral devices can be easily connected using the screw-terminal block.

## **Specifications**

Display: 6-digit, 7-segment LED, 14mm/0.6" high

Enclosure: Aluminum extrusion

Annunciators: Zero, stable, tare, gross, net, lb, oz, kg,

g, t, T

Keypad: 7 keys, color coded membrane

Units: Pounds, pounds/ounces, ounces, tons,

kilograms, grams, metric tons

Division Value: 1 to 99 x 10, 1, 0.1, 0.01, 0.001

Sample Rate: 1 to 100 samples per second, selectable

Load Cells: 8 each, 350 ohm minimum resistance

Excitation: 12 VDC

Sensitivity: NTEP 0.3µV/e (Class III/IIIL)

Canada 0.3µV/e (Class III/IIIHD)

OIML 0.7µV/e (Class III)

Resolution: Non-Commercial 240,000

NTEP 10,000 (Class III/IIIL)

Canada 10,000 (Class III/IIIHD)

OIML 10,000 (Class III)

Power: 15v, 1 amp with 90 to 260 VAC


50/60 Hz plug-in power supply

Temperature Range: -10 to +40 °C / +14 to +104 °F

I/O: 1 bidirectional RS232 (20mA)

1 output only RS232 (20mA)

Optional analog output

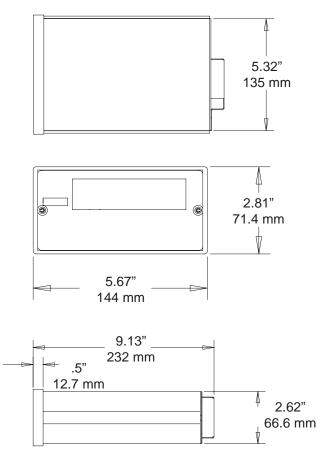



This indicator meets all requirements of Handbook 44, issued by the National Institute of Standards and Technology and has been issued the Certificate of Conformance number 01-011.





**OIML**R76/1992-DK-01.02



Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice.





Notice of Approval

Sold By:

